


# Wireless Vantage Pro2™ & Vantage Pro2™ Plus Stations

(Including Fan-Aspirated Models)



**6152    6162**  
**6153    6163**

**VANTAGE PRO2™**

The Vantage Pro2™ (6152, 6153) and Vantage Pro2™ Plus (6162, 6163) Wireless Weather Stations include two components: the Integrated Sensor Suite (ISS) which houses and manages the external sensor array, and the console which provides the user interface, data display, A/D conversion in the ISS, and calculations. The ISS and Vantage Pro2 console communicate via an FCC-certified, license-free frequency hopping transmitter and receiver. User-selectable transmitter ID codes allow up to eight stations to coexist in the same geographic area. The frequency hopping spread spectrum technology provides greater communication strength over longer distances and areas of weaker reception. The Wireless Vantage Pro2™ Plus weather station includes two additional sensors that are optional on the Vantage Pro2: the UV sensor and the solar radiation sensor. The console may be powered by batteries or by the included AC-power adapter. The wireless ISS is solar powered with a battery backup. Use WeatherLink™ for Vantage Pro and Vantage Pro2 to let your weather station interface with a computer, to log weather data, and to upload weather information to the internet.

The 6152 and 6162 rely on passive shielding to reduce solar-radiation induced temperature errors in the outside temperature sensor readings. The Fan-aspirated 6153 and 6163 combine passive shielding with a solar-powered fan that draws outside air in over the temperature and humidity sensors, providing a much more accurate temperature reading than that available using passive shielding alone.

## Integrated Sensor Suite (ISS)

- Operating Temperature . . . . . -40° to +150°F (-40° to +65°C)
- Non-operating Temperature . . . . . -50° to +158°F (-45° to +70°C)
- Current Draw (ISS SIM only) . . . . . 0.14 mA (average), 30 mA (peak) at 4 to 6 VDC
- Solar Power Panel (ISS SIM / Fan-Aspirated) . . . . . 0.5 Watts / 0.75 Watts
- Battery (ISS SIM / Fan-Aspirated) . . . . . CR-123 3-Volt Lithium cell / 2 - 1.2 Volt NiCad C-cells
- Battery Life (3-Volt Lithium cell) . . . . . 8 months without sunlight - greater than 2 years depending on solar charging
- Battery Life (NiCad C-cells) . . . . . 1 year
- Fan Aspiration Rate (Fan-Aspirated Only) . . . . . 190 feet/min. (0.9 m/s) (full sun), 80 feet/min. (0.4 m/s) (battery only)  
(intake flow rate) 500 feet/min. (2.5 m/s) (full sun), 280 feet/min.  
(1.4 m/s) (battery only) (sensor chamber flow rate)
- Connectors, Sensor . . . . . Modular RJ-11
- Cable Type . . . . . 4-conductor, 26 AWG
- Cable Length, Anemometer . . . . . 40' (12 m) (included) 540' (165 m) (maximum recommended)
- Wind Speed Sensor . . . . . Wind cups with magnetic switch
- Wind Direction Sensor . . . . . Wind vane with potentiometer
- Rain Collector Type . . . . . Tip bucket, 0.01" per tip (0.2 mm with metric rain adapter), 33.2 in<sup>2</sup>  
(214 cm<sup>2</sup>) collection area
- Temperature Sensor Type . . . . . Thermistor
- Relative Humidity Sensor Type . . . . . Film capacitor element
- Housing Material . . . . . UV-resistant PVC plastic

ISS Dimensions:

Product #	(Length x Width x Height)	Package Weight
6152	11.00" x 9.38" x 14.00"	5.7 lbs. (2.6 kg)
6162	(279 mm x 238 mm x 355 mm)	6.1 lbs. (2.6 kg)
6153	11.00" x 9.38" x 21.00"	8.6 lbs. (3.9 kg)
6163	(279 mm x 238 mm x 533 mm)	9 lbs. (4.1 kg)

## Console

---

Console Operating Temperature	+14° to +140°F (-10° to +60°C)
Display Temperature	+32° to +140°F (0° to +60°C)
Non-operating Temperature	-5° to +158°F (-20° to +70°C)
Current Draw	0.90 mA average, 20 mA peak, (plus 120 mA for display lamps, plus 0.125 mA for each optional wireless transmitter received by the console) at 4 to 6 VDC
AC Power Adapter	5 VDC, 900 mA, regulated
Batteries	3 C-cells
Battery Life	up to 9 months
Connectors	Modular RJ-11
Housing Material	UV-resistant PVC plastic
Console Display Type	LCD Transflective
Dimensions (console: length x width x height, display length x height)	
Console with antenna	10.375" x 1.5" x 6.13" (264 mm x 38 mm x 156 mm)
Console with antenna extended up	10.375" x 1.5" x 9.8" (264 mm x 38 mm x 248 mm)
Display	5.94" x 3.375" (151 mm x 86 mm)
Weight (with batteries)	1.88 lbs. (.85 kg)

## Data Displayed on Console

---

All data display categories are listed in alphabetical order:

### Barometric Pressure

Resolution and Units	0.01" Hg, 0.1 mm Hg, 0.1 hPa/mb (user-selectable)
Corrected Range	26.00" to 32.00" Hg, 660.0 to 810.0 mm Hg, 880.0 to 1080.0 hPa/mb
Uncorrected Range	16.00" to 33.50" Hg, 406.0 to 850.0 mm Hg, 542.0 to 1130.0 hPa/mb
Elevation Range	-999' to +15,300' (-305 m to 4670 m)
Uncorrected Reading Accuracy	±0.03" Hg (±0.8 mm Hg, ±1.0 hPa/mb) (at room temperature)
Sea-Level Reduction Equation Used	United States Method employed prior to use of current "R Factor" method
Equation Source	Smithsonian Meteorological Tables
Equation Accuracy	±0.01" Hg (±0.3 mm Hg, ±0.3 hPa/mb)
Elevation Accuracy Required	±10' (3m) to meet equation accuracy specification
Overall Accuracy	±0.04" Hg (±1.0 mm Hg, ±1.4 hPa/mb)
Trend (change in 3 hours)	Change 0.06" (2 hPa/mb, 1.5 mm Hg) = Rapidly Change 0.02" (.7hPa/mb, .5 mm Hg)= Slowly
Trend Indication	5 position arrow: Rising (rapidly or slowly), Steady, or Falling (rapidly or slowly)
Update Interval	15 minutes or when console BAR key is pressed twice
Current Data	Instant, 15-min., and Hourly Reading; Daily, Monthly, High and Low
Historical Data	15-min. and Hourly Reading; Daily, Monthly Highs and Lows
Alarms	High Threshold from Current Trend for Storm Clearing (Rising Trend) Low Threshold from Current Trend for Storm Warning (Falling Trend)
Range for Rising and Falling Trend Alarms	0.01 to 0.25" Hg (0.1 to 6.4 mm Hg, 0.1 to 8.5 hPa/mb )

### Clock

Resolution	1 minute
Units	Time: 12 or 24 hour format (user-selectable)
Date	US or International format (user-selectable)
Accuracy	±8 seconds/month
Adjustments	Time: Automatic Daylight Savings Time (for users in North America, Europe and Australia that observe it in AUTO mode, MANUAL setting available for all other areas) Date: Automatic Leap Year
Alarms	Once per day at set time when active

## Dewpoint (calculated)

Resolution and Units	1°F or 1°C (user-selectable)
Range	-105° to +130°F (-76° to +54°C)
Accuracy	±3°F (±1.5°C) (typical)
Update Interval	10 to 12 seconds
Source	World Meteorological Organization (WMO)
Equation Used	WMO Equation with respect to saturation of moist air over water
Variables Used	Instant Outside Temperature and Instant Outside Relative Humidity
Current Data	Instant Calculation; Daily, Monthly High and Low
Historical Data	Hourly Calculations; Daily, Monthly Highs and Lows
Alarms	High and Low Threshold from Instant Calculation

## Evapotranspiration (calculated, requires solar radiation sensor)

Resolution and Units	0.01" or 0.25 mm (user-selectable)
Range	Daily to 99.99" (999.9 mm); Monthly & Yearly to 199.99" (1999.9 mm)
Accuracy	Greater of 0.01" (0.25 mm) or ±5%, Reference: side-by-side comparison against a CIMIS ET weather station
Update Interval	1 hour
Calculation and Source	Penman-Monteith Equation as implemented by CIMIS (California Irrigation Management Information System) including Net Radiation calculation
Current Data	Latest Hourly Total Calculation, Daily, Monthly, Yearly Total
Historical Data	Hourly, Daily, Monthly, Yearly Totals
Alarm	High Threshold from Latest Daily Total Calculation

## Forecast

Variables Used	Barometric Reading & Trend, Wind Speed & Direction, Rainfall, Temperature, Humidity, Latitude & Longitude, Time of Year
Update Interval	1 hour
Display Format	Icons on top center of display; detailed message in ticker at bottom
Variables Predicted	Sky Condition, Precipitation, Temperature Changes, Wind Direction and Speed

## General

Historical Data	Includes the past 24 values listed unless otherwise noted; all can be cleared and all totals reset
Daily Data	Includes the earliest time of occurrence of highs and lows; period begins/ends at 12:00 am
Monthly Data	Period begins/ends at 12:00 am on the first of the month
Yearly Data	Period begins/ends at 12:00 am on the first of January unless otherwise noted
Current Data	Current data appears in the right most column in the console graph and represents the latest value within the last period on the graph; totals can be set or reset
Graph Time Interval	1 min., 10 min., 15 min., 1 hour, 1 day, 1 month, 1 year (user-selectable, availability depends upon variable selected)
Graph Time Span	24 Intervals + Current Interval (see Graph Intervals to determine time span)
Graph Variable Span (Vertical Scale)	Automatic (varies depending upon data range); Maximum and Minimum value in range appear in ticker
Alarm Indication	Alarms sound for only 2 minutes (time alarm is always 1 minute) if operating on battery power. Alarm message is displayed in ticker as long as threshold is met or exceeded. Alarms can be silenced (but not cleared) by pressing the DONE key.
Update Interval	Varies with sensor - see individual sensor specs Also varies with transmitter ID code - #1=shortest, #8=longest

## Heat Index (calculated)

Resolution and Units	1°F or 1°C (user-selectable)
----------------------	------------------------------

Range	-40° to +135°F (-40° to +57°C)
Accuracy	±3°F (±1.5°C) (typical)
Update Interval	10 to 12 seconds
Source	United States National Weather Service(NWS)/NOAA
Formulation Used	Steadman (1979) modified by US NWS/NOAA and Davis Instruments to increase range of use
Variables Used	Instant Outside Temperature and Instant Outside Relative Humidity
Current Data	Instant Calculation; Daily, Monthly High
Historical Data	Hourly Calculations; Daily, Monthly Highs
Alarm	High Threshold from Instant Calculation

## Humidity

### Inside Relative Humidity (sensor located in console)

Range	10 to 90% RH
Accuracy	±5%
Update Interval	1 minute
Current Data	Instant (user adjustable) and Hourly Reading; Daily, Monthly High and Low
Historical Data	Hourly Readings; Daily, Monthly Highs and Lows
Alarms	High and Low Threshold from Instant Reading

### Outside Relative Humidity (sensor located in ISS)

Range	1 to 100% RH
Accuracy	±3% (0 to 90% RH), ±4% (90 to 100% RH)
Temperature Coefficient	0.03% per °F (0.05% per °C), reference 68°F (20°C)
Drift	±0.5% per year
Update Interval	50 seconds to 1 minute
Current Data	Instant (user adjustable) and Hourly Reading; Daily, Monthly High and Low
Historical Data	Hourly Readings; Daily, Monthly Highs and Lows
Alarms	High and Low Threshold from Instant Reading

### Extra Outside Relative Humidity (sensor located inside Temperature/Humidity Station)

Range	0 to 100% RH
Accuracy	±3% (0 to 90% RH), ±4% (90 to 100% RH)
Temperature Coefficient	0.03% per °F (0.05% per °C), reference 68°F (20°C)
Drift	±0.5% per year
Update Interval	50 seconds to 1 minute
Current Data	Instant Reading (user adjustable)
Alarms	High and Low Threshold from Instant Reading

## Leaf Wetness (requires leaf wetness sensor)

Resolution	1
Range	0 to 15
Dry/Wet Threshold	User-selectable
Accuracy	±0.5
Update Interval	15 to 18 seconds
Current Data	Instant Reading; Daily High and Low; Monthly High
Historical Data	Hourly Readings; Daily Highs and Lows; Monthly Highs
Alarms	High and Low Thresholds from Instant Reading

## Moon Phase

Console Resolution	1/8 (12.5%) of a lunar cycle, 1/4 (25%) of lighted face on console
WeatherLink Resolution	0.09% of a lunar cycle, 0.18% of lighted face maximum (depends on screen resolution)
Range	New Moon, Waxing Crescent, First Quarter, Waxing Gibbous, Full Moon, Waning Gibbous, Last Quarter, Waning Crescent
Accuracy	±38 minutes

## Rainfall

Resolution and Units	0.01" or 0.25 mm (user-selectable) (1 mm at totals ≥ 2000 mm)
----------------------	---

Daily/Storm Rainfall Range	0 to 99.99" (0 to 9999 mm)
Monthly/Yearly/Total Rainfall Range	0 to 199.99" (0 to 19999 mm)
Rain Rate	0 to 199.99" (0 to 19999 mm)
Accuracy	For rain rates up to 2"/hr (50 mm/hr): $\pm 4\%$ of total or +0.01" (0.25 mm) (0.01" = one tip of the bucket), whichever is greater For rain rates from 2"/hr (50 mm/hr) to 4"/hr (100 mm/hr): $\pm 5\%$ of total or +0.01" (0.25 mm) (0.01" = one tip of the bucket), whichever is greater
Update Interval	10 to 12 seconds
Storm Determination Method	0.02" (0.5 mm) begins a storm event, 24 hours without further accumulation ends a storm event
Current Data	Totals for Past 15-min, Past 24-hour, Daily, Monthly, Yearly (start date user-selectable) and Storm (with begin date); Umbrella is displayed when 15 minute Total exceeds zero
Historical Data	Totals for 15-min, Daily, Monthly, Yearly (start date user-selectable) and Storm (with begin and end dates)
Alarms	High Threshold from Latest Flash Flood (15-min. Total, default is 0.50", 12.7 mm), 24-hour Total, Storm Total,
Range for Rain Alarms	0 to 99.99" (0 to 999.7 mm )

### Rain Rate

Resolution and Units	0.01" or 0.25 mm (user-selectable) at typical rates (see Fig. 3 and 4)
Range	0, 0.04"/hr (1 mm/hr) to 100"/hr (0 to 1999.9 mm/hr)
Accuracy	$\pm 5\%$ or $\pm 0.04$ "/hr (1 mm/hr) (up to 10"/hr. (250 mm/hr.)), whichever is greater
Update Interval	10 to 12 seconds
Calculation Method	Measures time between successive tips of rain collector. Elapsed time greater than 15 minutes or only one tip of the rain collector constitutes a rain rate of zero.
Current Data	Instant and 1-min. Reading; Hourly, Daily, Monthly and Yearly High
Historical Data	1-min Reading; Hourly, Daily, Monthly and Yearly Highs
Alarm	High Threshold from Instant Reading

### Soil Moisture (requires soil moisture Sensor)

Resolution	1 cb
Range	0 to 200 cb
Update Interval	62.5 to 75 seconds
Current Data	Instant Reading; Daily and Monthly High and Low
Historical Data	Hourly Readings; Daily and Monthly Highs and Lows
Alarms	High and Low Thresholds from Instant Reading

### Solar Radiation (requires solar radiation sensor)

Resolution and Units	1 W/m <sup>2</sup>
Range	0 to 1800 W/m <sup>2</sup>
Accuracy	$\pm 5\%$ of full scale (Reference: Eppley PSP at 1000 W/m <sup>2</sup> )
Drift	up to $\pm 2\%$ per year
Cosine Response	$\pm 3\%$ for angle of incidence from 0° to 75°
Temperature Coefficient	-0.067% per °F (-0.12% per °C); reference temperature = 77°F (25 °C)
Update Interval	50 seconds to 1 minute (5 minutes when dark)
Current Data	Instant Reading and Hourly Average; Daily, Monthly High
Historical Data	Hourly Average, Daily, Monthly Highs
Alarm	High Threshold from Instant Reading

### Sunrise and Sunset

Resolution	1 minute
Accuracy	$\pm 1$ minute
Reference	United States Naval Observatory

## Temperature

### Inside Temperature (sensor located in console)

Resolution and Units	Current Data: 0.1°F or 1°F or 0.1°C or 1°C (user-selectable) Historical Data and Alarms: 1°F or 1°C (user-selectable)
Range	+32° to +140°F (0° to +60°C)
Sensor Accuracy	±1°F (±0.5°C) up to 110°F (43°C), ±2°F (±1°C) over 110°F (43°C)
Update Interval	1 minute
Current Data	Instant Reading (user adjustable); Daily and Monthly High and Low
Historical Data	Hourly Readings; Daily and Monthly Highs and Lows
Alarms	High and Low Thresholds from Instant Reading

### Outside Temperature (sensor located in ISS)

Resolution and Units	Current Data: 0.1°F or 1°F or 0.1°C or 1°C (user-selectable) nominal (see Fig. 1) Historical Data and Alarms: 1°F or 1°C (user-selectable)
Range	-40° to +150°F (-40° to +65°C)
Sensor Accuracy	±1°F (±0.5°C) up to 110°F (43°C), ±2°F (±1°C) over 110°F (43°C) (see Fig. 2)
Radiation Induced Error (Passive Shield)	+4°F (2°C) at solar noon (insolation = 1040 W/m <sup>2</sup> , avg. wind speed ≤ 2 mph (1 m/s)) (reference: RM Young Model 43408 Fan-Aspirated Radiation Shield)
Radiation Induced Error (Fan-Aspirated Shield)	+0.6°F (0.3°C) at solar noon (insolation = 1040 W/m <sup>2</sup> , avg. wind speed ≤ 2 mph (1 m/s)) (reference: RM Young Model 43408 Fan-Aspirated Radiation Shield)
Update Interval	10 to 12 seconds
Current Data	Instant Reading (user adjustable); Daily, Monthly, Yearly High and Low
Historical Data	Hourly Readings; Daily, Monthly, Yearly Highs and Lows
Alarms	High and Low Thresholds from Instant Reading

### Extra Temperature Sensors or Probes

Resolution and Units	1°F or 1°C (user-selectable) Historical Data and Alarms: 1°F or 1°C (user-selectable)
Range	-40° to +150°F (-40° to +65°C)
Sensor Accuracy	±1°F (±0.5°C) up to 110°F (43°C), ±2°F (±1°C) over 110°F (43°C) (see Fig. 2)
Update Interval	10 to 12 seconds (40 to 48 seconds for Leaf Wetness/Temperature and Soil Moisture/Temperature Stations)
Current Data	Instant Reading (user adjustable)
Alarms	High and Low Thresholds from Instant Reading

## Temperature Humidity Sun Wind Index (requires solar radiation sensor)

Resolution and Units	1°F or 1°C (user-selectable)
Range	-90° to +135°F (-68° to +64°C)
Accuracy	±4°F (±2°C) (typical)
Update Interval	10 to 12 seconds
Sources and Formulation Used	United States National Weather Service(NWS)/NOAA Steadman (1979) modified by US NWS/NOAA and Davis Instruments to increase range of use and allow for cold weather use
Variables Used	Instant Outside Temperature, Instant Outside Relative Humidity, 10-minute Average Wind Speed, 10-minute Average Solar Radiation
Formulation Description	Uses Heat Index as base temperature, affects of wind and solar radiation are either added or subtracted from this base to give an overall effective temperature
Current Data	Instant and Hourly Calculation; Daily, Monthly High
Historical Data	Hourly Calculation; Daily, Monthly Highs
Alarm	High Threshold from Instant Reading

## Ultra Violet (UV) Radiation Dose (requires UV sensor)

Resolution and Units	0.1 MEDs to 19.9 MEDs; 1 MED above 19.9 MEDS
Range	0 to 199 MEDs
Accuracy	±5% of daily total
Drift	up to ±2% per year
Update Interval	50 seconds to 1 minute (5 minutes when dark)

Current Data	Latest Daily Total (user resetable at any time from Current Screen)
Historical Data	Hourly, Daily Totals (user reset from Current Screen does not affect these values)
Alarm	High Threshold from Daily Total
Alarm Range	0 to 19.9 MEDs

### Ultra Violet (UV) Radiation Index (requires UV sensor)

Resolution and Units	0.1 Index
Range	0 to 16 Index
Accuracy	±5% of full scale (Reference: Yankee UVB-1 at UV index 10 (Extremely High))
Cosine Reponse	±4% (0° to 65° incident angle); 9% (65° to 85° incident angle)
Update Interval	50 seconds to 1 minute (5 minutes when dark)
Current Data	Instant Reading and Hourly Average; Daily, Monthly High
Historical Data	Hourly Average, Daily, Monthly Highs
Alarm	High Threshold from Instant Calculation

### Wind

#### Wind Chill (Calculated)

Resolution and Units	1°F or 1°C (user-selectable)
Range	-110° to +130°F (-79° to +54°C)
Accuracy	±2°F (±1°C) (typical)
Update Interval	10 to 12 seconds
Source	United States National Weather Service (NWS)/NOAA
Equation Used	Osczevski (1995) (adopted by US NWS in 2001)
Variables Used	Instant Outside Temperature and 10-min. Avg. Wind Speed
Current Data	Instant Calculation; Hourly, Daily and Monthly Low
Historical Data	Hourly, Daily and Monthly Lows
Alarm	Low Threshold from Instant Calculation

#### Wind Direction

Display Resolution	16 points (22.5°) on compass rose, 1° in numeric display
Accuracy	±4°
Update Interval	2.5 to 3 seconds
Current Data	Instant Reading (user adjustable); 10-min. Dominant; Hourly, Daily, Monthly Dominant
Historical Data	Past 6 10-min. Dominants on compass rose only; Hourly, Daily, Monthly Dominants

#### Wind Speed

Resolution and Units	1 mph, 1 km/h, 0.1 m/s, or 1 knot (user-selectable)
Range (large wind cups)	2 to 150 mph, 2 to 130 knots, 1 to 67 m/s, 3 to 241 km/h
Range (small wind cups)	3 to 175 mph, 3 to 150 knots, 1.5 to 79 m/s, 5 to 282 km/h
Update Interval	Instant Reading: 2.5 to 3 seconds, 10-minute Average: 1 minute
Accuracy (large wind cups)	±2 mph (2 kts, 3 km/h, 1 m/s) or ±5%, whichever is greater
Accuracy (small wind cups)	±3 mph (3 kts, 5 km/h, 1.5 m/s) or ±5%, whichever is greater
Maximum Cable Length	540' (165 m)
Current Data	Instant Reading; 10-minute and Hourly Average; Hourly High; Daily, Monthly and Yearly High with Direction of High
Historical Data	10-min. and Hourly Averages; Hourly Highs; Daily, Monthly and Yearly Highs with Direction of Highs
Alarms	High Thresholds from Instant Reading and 10-minute Average

### Wireless Communications

Transmit/Receive Frequency	US Models: 902-928 MHz FHSS, Overseas Models: 868.0 - 868.6 MHz FHSS.
ID Codes Available	8
Output Power	902-928 MHz FHSS: FCC-certified low power, less than 8 mW, no license required 868.0 - 868.6 MHz FHSS. CE-certified, less than 8 mW, no license required

Range

- Line of Sight . . . . . up to 1000 feet (300 m)
- Through Walls . . . . . 200 to 400 feet (75 to 150 m)

Sensor Inputs

- RF Filtering . . . . . RC low-pass filter on each signal line

## Sensor Charts

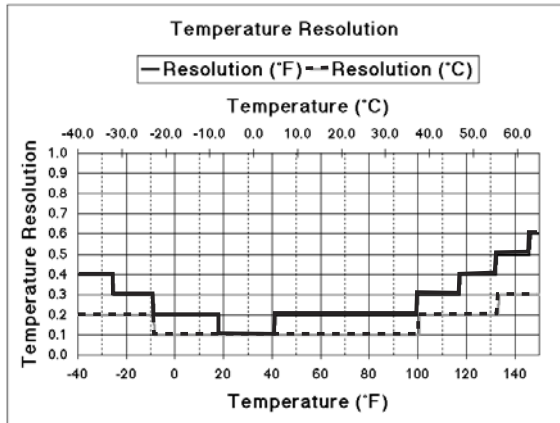


Figure 1. Temperature Resolution

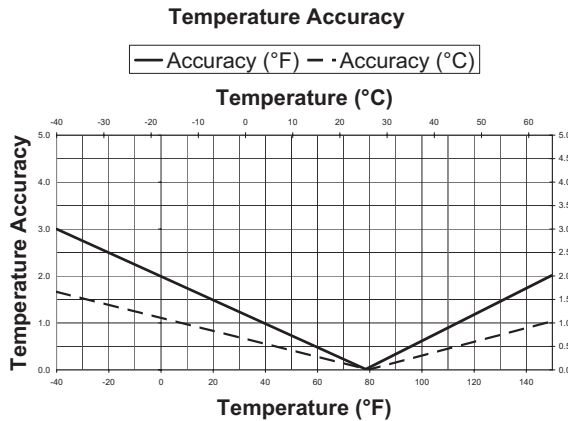


Figure 2. Temperature Accuracy

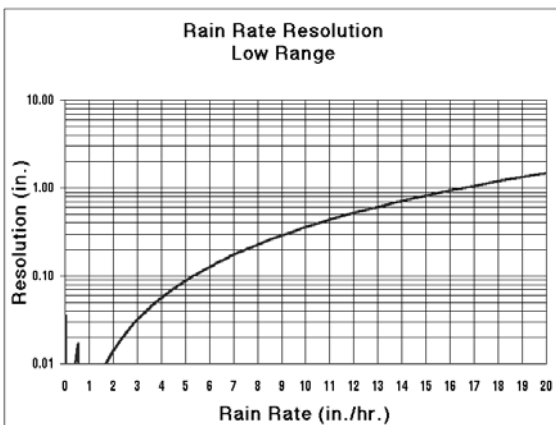


Figure 3. Low Range Rain Rate Resolution

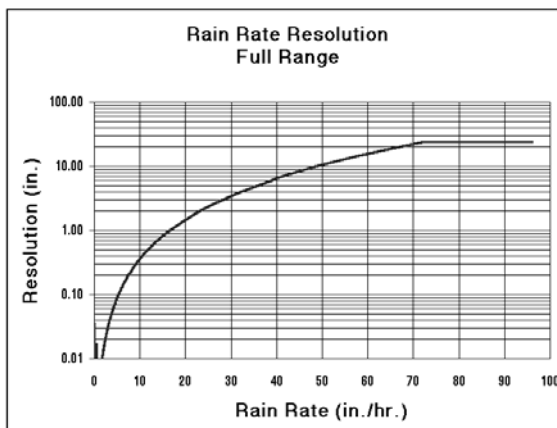


Figure 4. Full Range Rain Rate Resolution

## Package Dimensions

Product #	Package Dimensions (Length x Width x Height)	Package Weight	UPC Codes
6152 6152EU 6152UK	17.0" x 11.0" x 13.0" (410 mm x 264 mm x 330 mm)	12.8 lbs. (5.8 kg)	011698 00229 0 011698 00347 1 011698 00348 8
6162 6162EU 6162UK		13.3 lbs. (6.0 kg)	011698 00306 8 011698 00307 5 001698 00308 2
6153 6153EU 6153UK	15.0" x 13.0" x 24.0" (378 mm x 327 mm x 594 mm)	12.8 lbs. (5.8 kg)	011698 00335 8 011698 00336 5 001698 00337 2
6163 6163EU 6163UK		13.3 lbs. (6.0 kg)	011698 00341 9 011698 00342 6 001698 00342 3